



# [ KVM-524G / 514G KVM-524GS / 514GS ]

- 4" CRT B/W VDP
- Up to 6 indoor units (3 monitor & 3 audio handset, KDP-602G) and 1 front door camera connection
- Internal call & conversation function between extended indoor units in a house
- Audio + video conversation with visitor
- Door open function
- KVM-524G, KVM-524GS : AC type, KVM-514G, KVM-514GS : DC type


## Specifications

Model no.	KVM-524G / KVM-524GS	KVM-514G / KVM-514GS
Power	Trans AC110V or AC220V ± 10%	DC17V
Power consumption	Max. 15W, Stand by 2.3W	
Assurance temperature	0°C ~ +50°C	
Communication systems	Duplex handset conversation	
CRT	4 " flat tube	
Wiring	4wires in polarity	
Max. wiring distance	∅0.65 single cable : 50m, 5C-2V coaxial cable : 100m	
Mount type	Surface mount	
Dimension (mm)	210(W) x 222(H) x 57(D)	
Weight (approx. kg)	1.7kgs	
Audio handset connection	KDP-602G	
Camera connection	KC-B61, KC-B63(angle adjustment), KC-D20 (metal pinhole)	

• The product may include option or additional functions.

## Diagram

### ■ KVM-524G / 524GS (AC type)

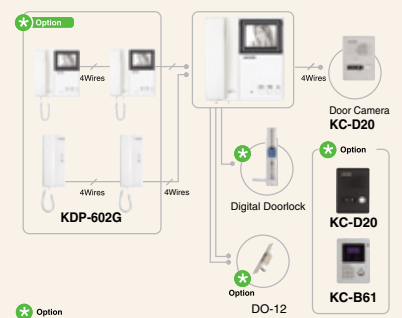

### ■ KVM-514G / 514GS (DC type)

